


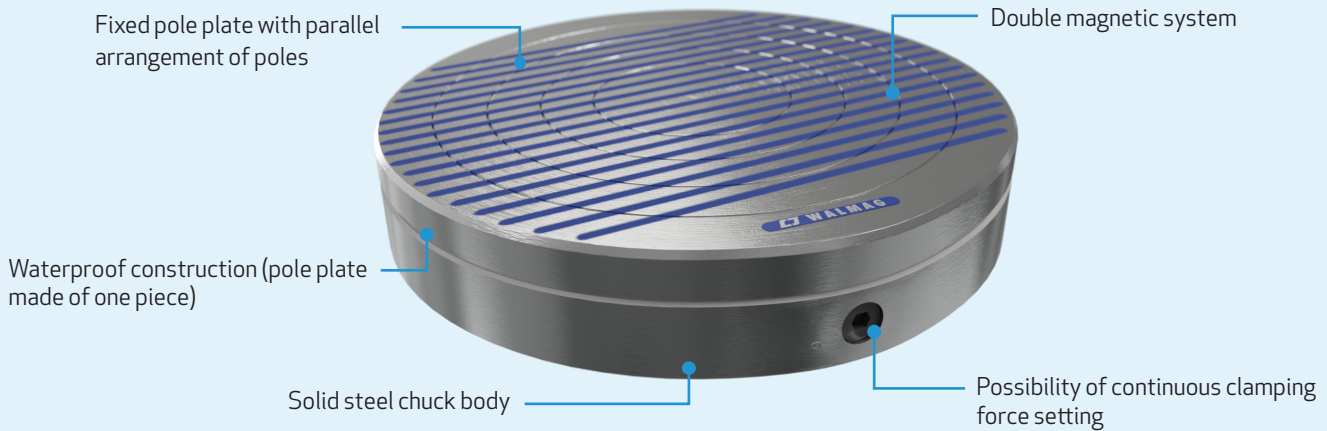


Maxgrip



**MONOBLOCK
PROTECTED**

-  100% WATERTIGHT
-  30% LONGER LIFE
-  15% LESS WEIGHT



When to choose the Maxgrip permanent magnetic clamp:

The high clamping force and versatility of the Maxgrip permanent magnetic chuck make it stand out. The combination of a pole plate with a relatively fine parallel pole arrangement and the ability to infinitely adjust the clamping force means that workpieces can be centred very easily during turning and grinding.

APPLICATION



Circular grinding

TECHNOLOGY



Permanent

CHUCK DIAMETER



from 155 mm

HOLDING FORCE



160 N/cm²

POLES



Parallel

Other important parameters:

Min. workpiece diameter: 40 mm
 Regrinding limit: 10 mm
 Pole pitch: T15 11+4 mm - steel/epoxy

Use:

- + clamping workpieces during turning and cylindrical grinding

Catalog number	D (mm)	H (mm)	G (mm)	D1 (mm)	Weight (kg)
MAXGRIP155	155	57	5	50	7
MAXGRIP200	200	57	5	60	15
MAXGRIP250	250	57	5	80	22
MAXGRIP300	300	57	6	150	32
MAXGRIP350	350	57	6	170	43
MAXGRIP400	400	57	8	200	56

