


Neomicro pallet

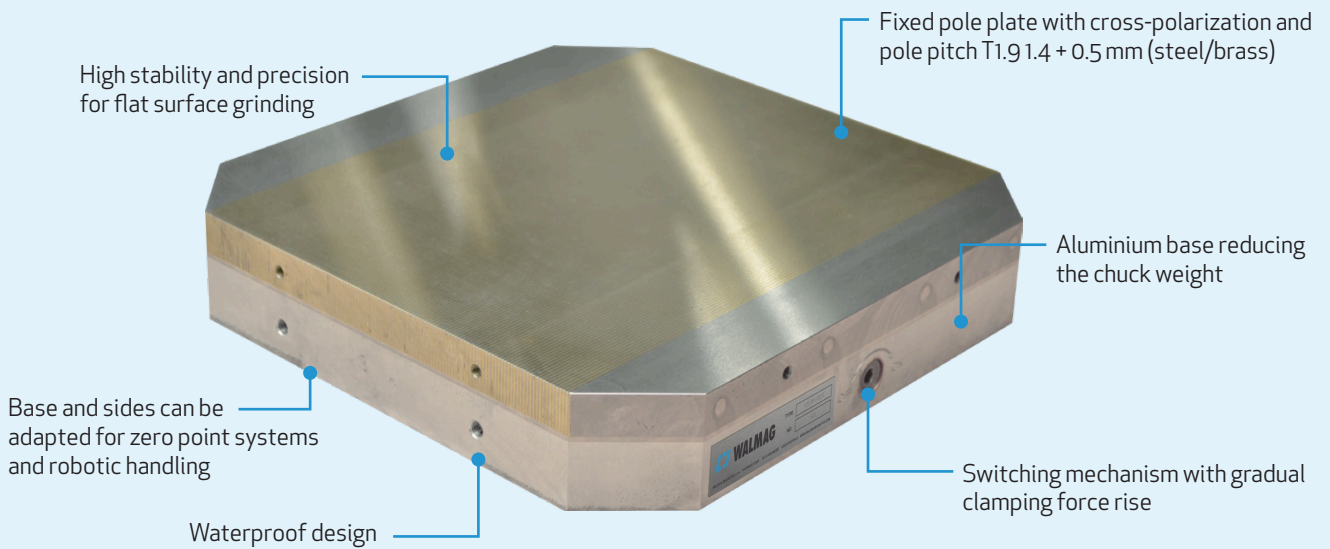

When to choose a Neomicro permanent magnetic pallet chuck:

The Neomicro permanent pallet chuck can be used for machining in automated production plants and machining centres. Suitable primarily for grinding and electrical discharge machining of a wide range of parts, from large to very small and thin.

APPLICATION



Grinding

TECHNOLOGY



Permanent

CHUCK DIMENSIONS



from 240 x 240 mm

HOLDING FORCE



100 N/cm²

POLES



Transverse

Other important parameters:

Min. workpiece size:	4 x 4 x 1 mm
Regrinding limit:	7 mm
Pole pitch:	T1.9 1.4+0.5 mm - steel/brass

Use:

- + precision flat grinding, and small and thin, as well as large parts
- + electrical discharge machining (EDM)

Catalog number	W (mm)	L (mm)	H* (mm)	Weight (kg)
NEOC240240P	240	240	63,5	21,5
NEOC280280P	280	280	63,5	29
NEOC320320P	320	320	63,5	38

*May vary for drilled versions for zero point systems

