


Neomill Compact pallet

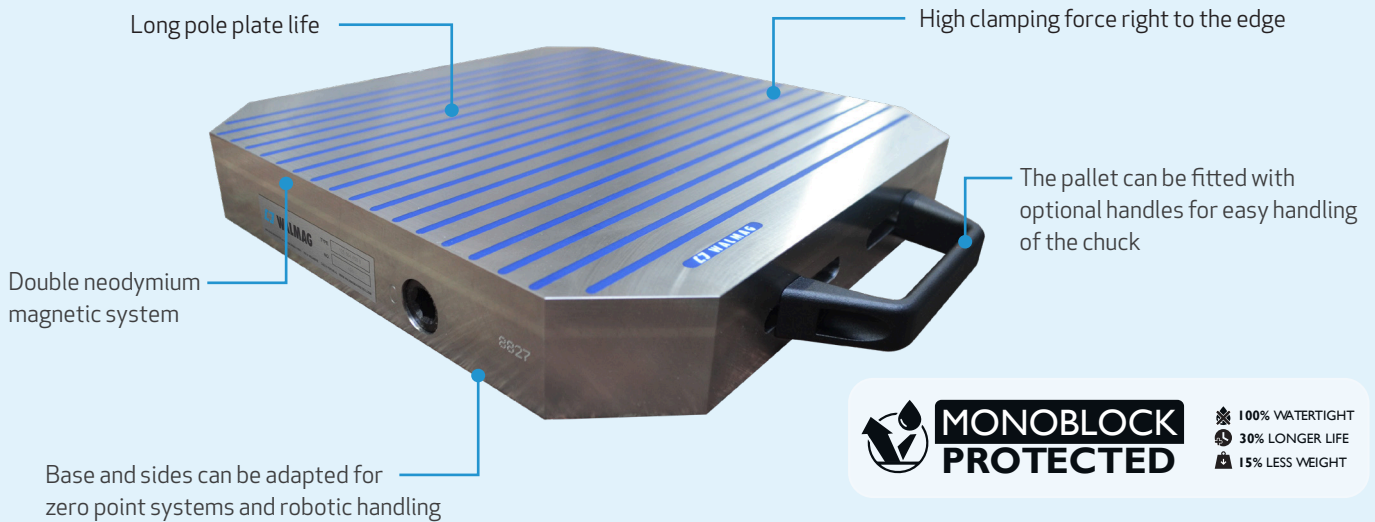

MONOBLOCK PROTECTED

- 100% WATERTIGHT
- 30% LONGER LIFE
- 15% LESS WEIGHT

When to choose a Neomill Compact pallet chuck:

The Neomill Compact pallet magnetic clamp has been designed for precise workpiece clamping in automated operations. It is suitable for machining, grinding, milling, EDM, and measuring operations, from smaller to medium and larger parts. You will use it everywhere a high clamping force and stability is required.

APPLICATION



Milling

TECHNOLOGY



Permanent

CHUCK DIMENSIONS



from 240 x 240 mm

HOLDING FORCE



160 N/cm²

POLES



Transverse

Other important parameters:

Min. workpiece size:	25 x 25 x 6 mm
Regrinding limit:	10 mm
Pole pitch:	T15 11+4 mm (steel/epoxy resin)

Use:

- + clamping small and large workpieces
- + moderately difficult and fast milling
- + demanding flat grinding
- + five-axis machining
- + electrical discharge machining - EDM

Catalog number	W (mm)	L (mm)	H* (mm)	Weight (kg)
NEOM240240	240	240	49	21
NEOM280280	280	280	49	28
NEOM320320	320	320	49	37

*May vary for drilled versions for zero point systems

