


Tunnel demagnetizer TDM

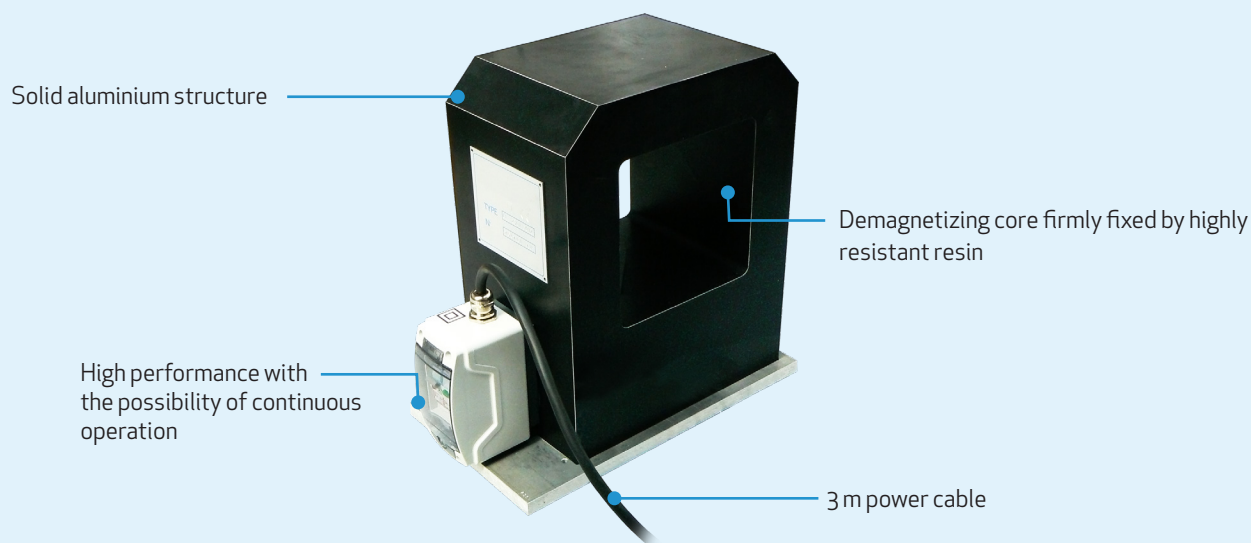

When to choose a TDM tunnel demagnetizer:

Tunnel demagnetizers are designed for the demagnetization of large components with a block or square shape or for bulk demagnetization of thin-walled components. The dimensions of the component should be similar to those of the tunnel opening. They are designed for continuous operation, so they can be used in industrial production with belt or roller conveyors.

APPLICATION	TECHNOLOGY	VOLTAGE	DUTY CYCLE	POWER CABLE
				
Demagnetization	Electro	400/230 VAC	100%	3 m


Important parameters:

Application:	Demagnetization
Technology:	Electromagnet
Working cycle:	100%
Power supply:	400/230 VAC (optional)
Power cable:	3 m

Use:

- + demagnetization of large parts, workpieces, and components of various shapes
- + suitable for continuous operation

Catalog number	Opening size (mm)	Voltage (VAC/Hz)
TDM1 230	180 x 180	230/50
TDM1 400	180 x 180	400/50
TDM2 230	255 x 255	230/50
TDM2 400	255 x 255	400/50
TDM4 400	450 x 450	400/50
TDM5 400	600 x 420	400/50

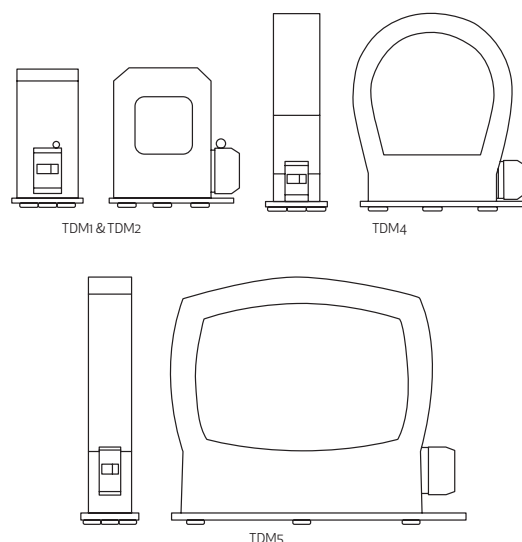

It can be delivered with a customised conveyor belt on request.