

GP 250

Lockable release lever for comfortable and safe operation

The large suspension lugs can be locked to prevent unwanted tipping from horizontal to vertical

Easy handling and tilting of loads from horizontal to vertical and vice versa

Lightweight, compact design



When to choose a GP 250 permanent crane magnet:

The GP 250 is a permanent crane magnet for handling metal sheets and steel plates from 3 mm thick. Loads up to 250 kg can be manoeuvred horizontally with up to 80 kg vertically. Thanks to its unique pole configuration, it is possible to use this magnet to take individual metal plates from a stack, from 4 mm thick. The magnet is in compliance with a carrying capacity factor of 4:1.


APPLICATION	TECHNOLOGY	HORIZONTAL WORKING LIMIT	VERTICAL WORKING LIMIT	SAFETY FACTOR
 Lifting	 Permanent	 up to 250 kg	 up to 80 kg	 4:1

Other important parameters:

Dimension: 288 x 200 x 40 mm
 Temperature: max. 80°C

Use:

- + handling of loads from horizontal to vertical and vice versa
- + handling stacked sheets from a material thickness of 4 mm

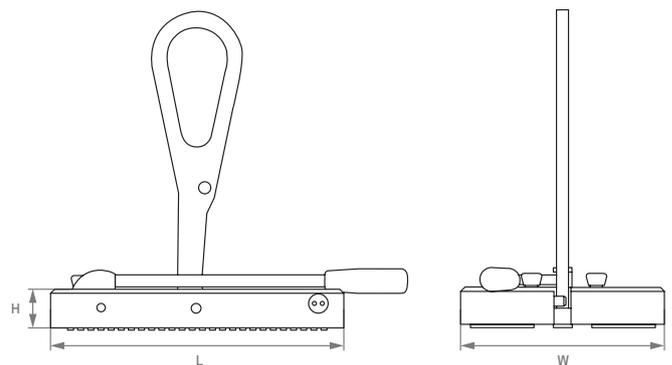

Catalog number	W (mm)	L (mm)	H (mm)	Horizontal limit (kg)	Vertical limit (kg)	Weight (kg)
GP250	200	288	38	250	80	9,75